

CAVIUS


WIRELESS
ALARM FAMILY
KEYFOB
REMOTE



DANISH
DESIGN



100%
TESTED

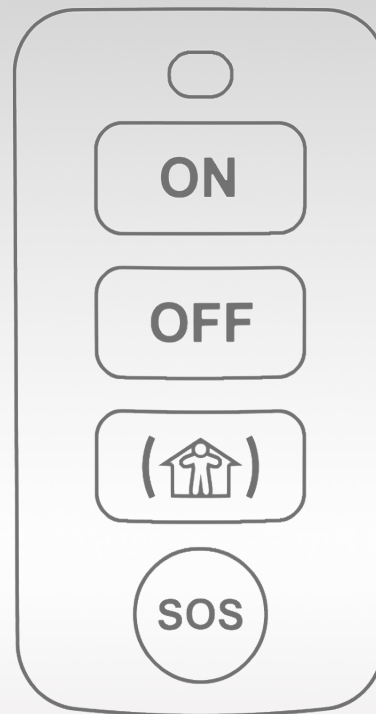

KEYFOB
REMOTE



ON

OFF



SOS

CAVIUS

PRODUCT NAME: CAVIUS KEYFOB REMOTE**PRODUCT NUMBER:** 6007

PRODUCT DATA:

DEVICE TYPE:

KeyFOB remote control for the CAVIUS home automation range.

USAGE:

Designed to send and receive with a build in encryption so it cannot be passed or hacked. It's possible to add more remotes to the same gateway. The KeyFOB vibrates when the house is locked.

PRODUCT DIMENSIONS:

H: 54 mm. W: 29 mm. x D 18 mm.

PRODUCT WEIGHT:

Base KeyFOB weight: 24 g.

OPERATION AC/DC:

DC

BATTERY TYPE:

Replaceable CR2032 Lithium

BATTERY LIFE:

Expected battery life: >2 years (by 100 operations/day).

LOW BATTERY INDICATION:

In app.

INTERLINK FREQUENCY:

868-869MHz

SIGNALS:

Transmits RF signals to the CAVIUS HUB when alarm stage is activated/disactivated.

INTERLINK RANGE:

300m in open field. Range depends on the building ateri-als and will need to be tested in each individual case.

VISIBLE INDICATOR:

A green LED lights up an the KEYFOB vibrates on confirmation.

PUSH BUTTON:

The KEYFOB have 4 buttons for function and lights up when sending:

1. Arm (lock)
2. Disarm (open)
3. Home mode (shell – door and window sensors active, but motion sensors not active so you can walk around indoor)
4. Attack/emergency (red)

DETECTION TIMING:

Duration of transmission is ~3 times receive interval.

WARRANTY:

10 year

APPROVALS:

RoHS
REACH
RED
LVD

CE TESTING INSTITUTE:

SGS

ASSOCIATIONS AND COMMITTEES:

CAVIUS is member of the NF292 committee.

CAVIUS is member of GIFSID, manufacturers' association of domestic fire safety equipment.

QUALITY ASSURANCE:

POWER CONSUMPTION:

100% tested

BATTERY VOLTAGE AND INTERNAL RESISTANCE:

100% tested

ALARM FUNCTION:

100% tested

INTERCONNECTION:

100% tested

VISUAL APPEARANCE:

100% tested

PACKING CONTENT:

100% tested

CONTACT

www.cavius.com

MANUFACTURER

Manufacturer: Cavius Aps, DK8600

CAVIUS



WIRELESS 
ALARM FAMILY
KEYFOB
REMOTE

